






**OUTBACK MATE 3 : SOFTWARE UPDATE**  
**VERSION 002.004.009**  
**DOWNLOAD AND INSTALLATION INSTRUCTIONS**

1. Plug the SD-Card into the SD-slot on your PC/Laptop or Printer. If you do not have this slot, an SD-Card reader can be purchased from most computer shops for about R200.00.
2. Delete any old files from the SD-Card.
3. Download the software update Version 002.004.009 from Sinetech's website, to the SD-Card. This is a 'Zip' file.  
<http://www.sinetech.co.za/software.htm>
4. Unzip the file using any Unzip programme, and 'extract' the files into same directly as the Zip file on the SD-CARD.
5. You will now see the following files on the SD-Card :

	Zip (this is the original zip file you downloaded from our website)
	Webfile (folder)
	M3e.bin (file)
	M3Ethe.bin (file)
	Screens

**HOW TO INSTALL**

1. Plug the SD-Card into the SD-slot on the Mate3 (with the black area facing you). Please insert the card gently until it clicks into position.
2. Remove the lower cover from the front of the Mate3.
3. Press the "Lock" button once.
4. Turn the big dial until the number "141" appears on the screen.
5. Press the middle button inside the big dial to Enter.
6. The screen shows "Main Menu".
7. Use the dial to move the cursor to "Firmware Update".
8. Press the middle Enter button again.
9. The screen shows "Firmware Update Mate3".
10. Press the middle Enter button again.
11. The screen shows the old software "Version 002.004.017".
12. Press the square "Update" button.
13. The screen will show that it is updating and various lights on the Mate3 will flash on and off while this takes place.
14. Wait until the "Status" light shows a steady green.
15. The update is now complete.
16. Push the SD-Card gently into the slot to release it, and remove.




## HOW TO VIEW

1. Download and install the web browser Mozilla Firefox onto your computer/laptop. The Mate3 does not work with Internet Explorer.



(free download from : <http://www.mozilla.com/en-US/firefox/new/>)

2. Make sure your Mate3 is either directly connected to a PC/Laptop with a twisted pair cable or that you are connected with a standard link to your hub.
3. After installing Mozilla Firefox, type the following address into the address bar (without any http: or www. in front) 192.168.0.64

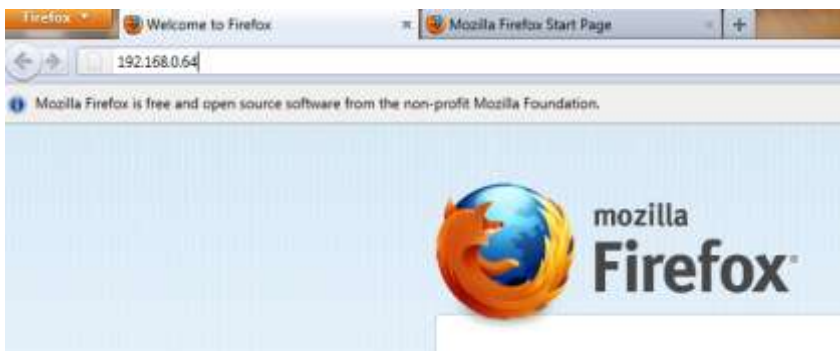

4. Press enter and you will instantly see the Mate3 Welcome Screen on your computer.

